


蝶阀型号、用途及结构特点 Model,Usage and Sftructure charcteristics

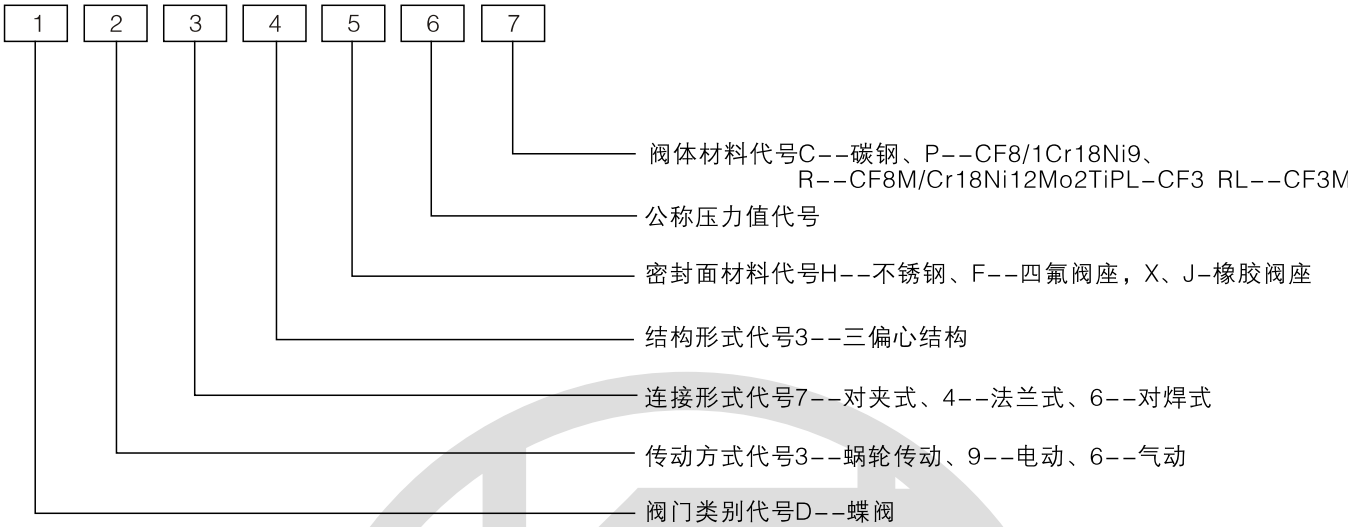

例一、D373H-25C表示


1、蝶阀（D） 2、蜗轮传动（3） 3、对夹式连接（7） 4、三偏心结构（3）
5、不锈钢密封圈（H） 6、公称压力2.5MPa（25） 7、碳钢阀体（C）

例二、D943F-16P表示

1、蝶阀（D） 2、电动（9） 3、法兰连接（4） 4、三偏心结构（3）
5、四氟阀座（F） 6、公称压力1.6MPa（16） 7、不锈钢阀体（P）

用途


蝶阀适用于食品、医药、石油化工、工业环保及高层建筑和管道上作调节流量和截断流体最佳装置。

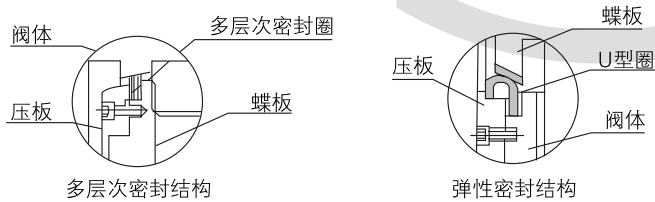

结构特点

- 蝶阀系吸收、消化国外技术，并结合国内用户意见和生产中积累的经验而精心研制的新一代产品。
- 1、采用三维偏心结构，阀体密封圈采用多层次结构或弹性金属圈，使蝶板同阀体密封面均匀可靠接触，可达到气密封无泄漏。
 - 2、结构独特、操作灵活、省力、方便、使用寿命长。
 - 3、耐高温、耐腐蚀、耐磨损的三维偏心。


蝶阀结构和材质 Butterfly Constructions & Material

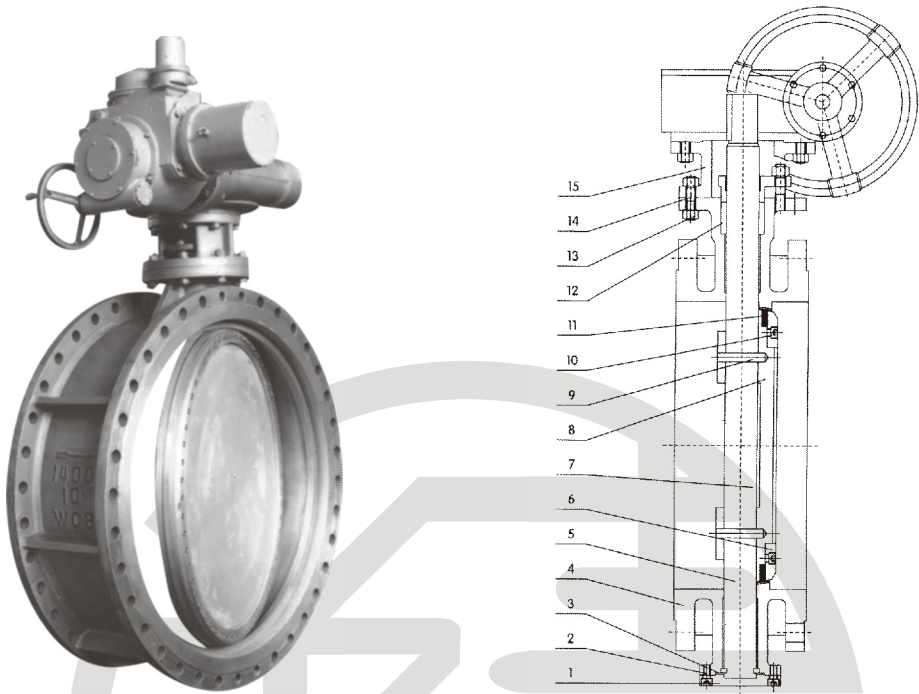

序号 NO	零件名称 Partsl	碳钢 Carbon steel		不锈钢 Stainless steel					
		GB	ASTM	GB		ASTM			
1	底盖 Bottom Cover Plate	25#	25#	1Cr18Ni9Ti	1Cr18Ni12Mo2Ti	F304	F316	F304L	F316L
2	底盖螺钉 Bottom Cover Stud	35CrMoA	A193-B7	1Cr17Ni2	1Cr17Ni2	A193-B8M	A193-B8M	A193-B8M	A193-B8M
3	底盖垫片 Bottom Cover Gasket	石墨	石墨	石墨	石墨	石墨	石墨	石墨	石墨
4	阀体 Body	WCB	A216-WCB	ZG1Cr18Ni9Ti	ZG1Cr18Ni12Mo2Ti	A351-CF8	A351-CF8M	A351-CF3	A351-CF3M
5	阀杆 Stem	2Cr13	A182-F316	1Cr18Ni9Ti	1Cr18Ni12Mo2Ti	F304	F316	F304L	F316L
6	压圈 Board	2Cr13	A240-316	1Cr18Ni9Ti	1Cr18Ni12Mo2Ti	F304	F316	F304L	F316L
7	蝶板 Disc	WCB	A351-CF8M	ZG1Cr18Ni9Ti	ZG1Cr18Ni12Mo2Ti	A351-CF8	A351-CF8M	A351-CF3	A351-CF3M
8	销轴 Stem Taper Pins	2Cr13	A276-316	1Cr18Ni9Ti	1Cr18Ni12Mo2Ti	304	316	304L	316L
9	蝶板螺钉 Disc Stud	35CrMoA	A193-B8M	1Cr17Ni2	1Cr17Ni2	A193-B8M	A193-B8M	A193-B8M	A193-B8M
10	密封圈 Seal Ring	石墨+304	石墨+304	石墨+304	石墨+304	石墨+304	石墨+316	石墨+304L	石墨+316L
11	衬套 Bush	铜合金	铜合金	304+PTFE	304+PTFE	304+PTFE	316+PTFE	304L+PTFE	316L+PTFE
12	填料 Packing	石墨	石墨	石墨	石墨	石墨	石墨	石墨	石墨
13	支架螺母 Yoke Nut	45	A194-2H	0Cr18Ni9	0Cr18Ni9	A194-8M	A194-8M	A194-8M	A194-8M
14	支架螺柱 Yoke Stud	35CrMoA	A193-B7	1Cr17Ni2	1Cr17Ni2	A193-B8M	A193-B8M	A193-B8M	A193-B8M
15	支架 Yoke	WCB	A216-WCB	WCB	WCB	A216-WCB	A216-WCB	A216-CF3	A216-WCB

手柄对夹式金属硬密封、氟塑料密封偏心蝶阀D73^H_{F-16}C(P.R.V)

■ Lever wafer metal hard seal, fluorine plastic seal eccentricity butterfly valve D73^H_{F-16} C(P.R.V)

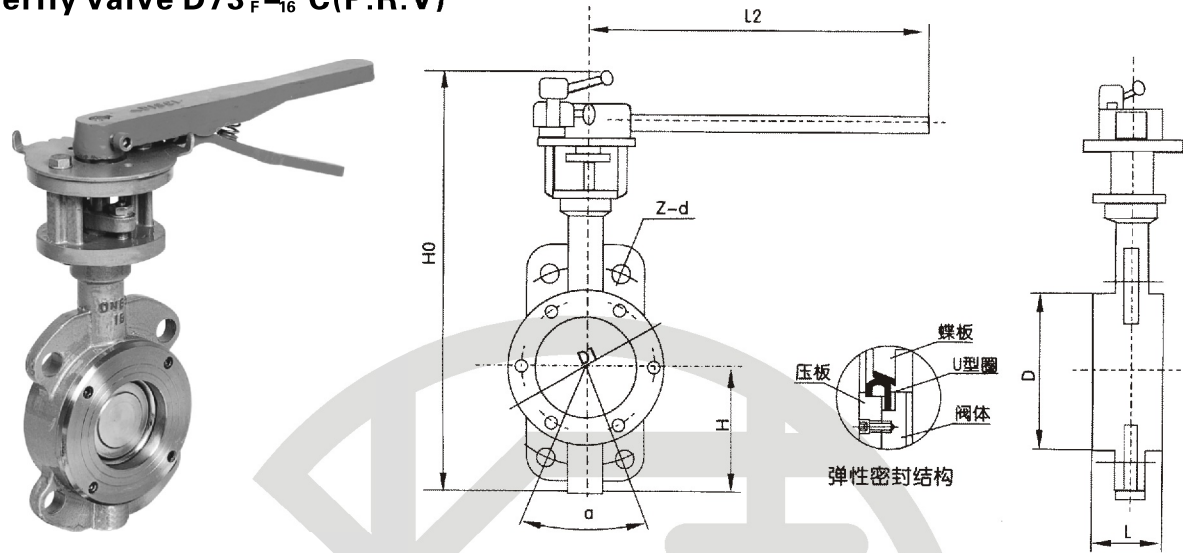

■ 应用规范:

- 1、设计、制造按GB/T12238-89
- 2、结构长度按GB/T12221-89
- 3、连接法兰：GB9113-88
- 4、阀门检查和试验按GB/T13927-92

■ NOTE

- 1.Design Manafacure According to GB/T12238-89
- 2.Face to Face According to GB12221-89
- 3.End Flange Dimension According to GB9113-88
- 4.Valve Check and Test According to GB13927-92

■ D73^H_F-10C(P.R.V)连接尺寸 Connection Dimension


通径 (DN) Diameter	L	D1	D	Z-Φd	H	Ho	α	L2	Wt/Kgs
50	43	125	102	4-18	100	340	90°	230	9
65	46	145	122	4-18	110	360	90°	230	11
80	64	160	133	8-18	120	380	45°	280	15
100	64	180	158	8-18	135	410	45°	280	18
125	70	210	184	8-18	160	460	45°	330	22
150	76	240	212	8-22	170	490	45°	330	25

■ D73^H_F-16C(P.R.V)连接尺寸 Connection Dimension

通径 (DN) Diameter	L	D1	D	Z-Φd	H	Ho	α	L2	Wt/Kgs
50	43	125	102	4-18	100	340	90°	230	10
65	46	145	122	4-18	110	360	90°	280	12
80	64	160	133	8-18	120	380	45°	280	16
100	64	180	158	8-18	135	410	45°	330	20
125	70	210	184	8-18	160	460	45°	330	24
150	76	240	212	8-22	170	490	45°	380	27

蜗轮传动对夹式金属硬密封、氟塑料偏心蝶阀D373^H_F-10C(P.R.V)

■ Worm wheel driving wafer metal hard sealing fluorine plastic eccentricity butterfly valve D373^H_F-10 C(P.R.V)

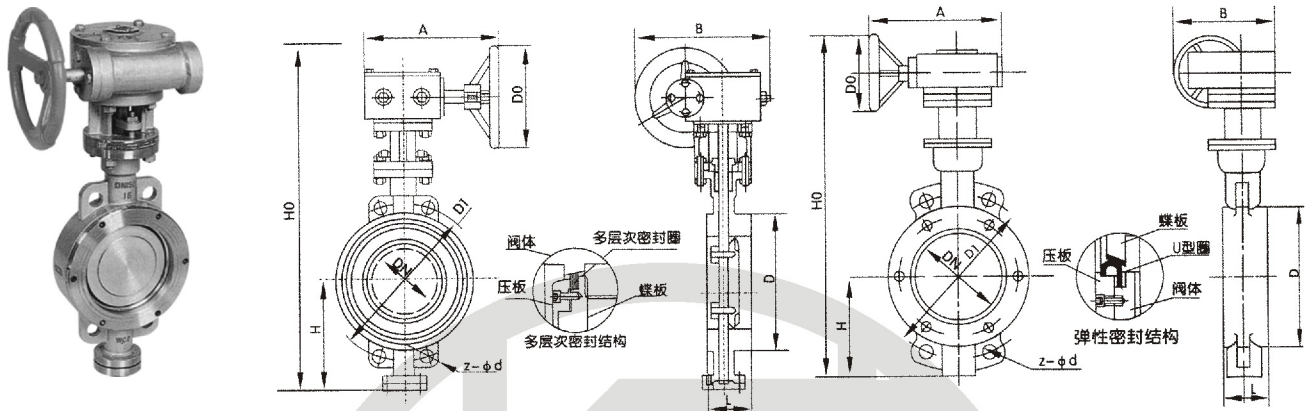

■ 应用规范:

- 1、设计、制造按GB/T12238-89
- 2、结构长度按GB/T12221-89
- 3、连接法兰：GB9113-88
- 4、阀门检查和试验按GB/T13927-92

■ NOTE

- 1.Design Manafacure According to GB/T12238-89
- 2.Face to Face According to GB12221-89
- 3.End Flange Dimension According to GB9113-88
- 4.Valve Check and Test According to GB13927-92

■ D373^H_F-10C(P.R.V)连接尺寸 Connection Dimension

通径 (DN) Diameter	L	D1	D	Z-Φd	H	Ho	A	B	Do	Wt/Kgs
50	43	125	102	4-18	112	260	200	200	160	13
65	46	145	122	4-18	115	280	200	200	160	16
80	64	160	133	8-18	120	355	220	200	160	21
100	64	180	158	8-18	140	390	240	200	160	26
125	70	210	184	8-18	170	490	260	200	160	31
150	76	240	212	8-22	180	630	280	280	240	35
200	89	295	268	8-22	210	690	320	280	240	41
.250	114	350	320	12-22	240	830	360	280	240	54
300	114	400	370	12-22	290	930	460	420	310	65
350	127	460	430	16-22	320	1010	500	420	310	100
400	140	515	482	16-26	350	1070	540	420	310	180
450	152	565	532	20-26	380	1140	580	420	310	210
500	152	620	585	20-26	410	1200	620	420	310	250
600	178	725	685	20-30	470	1340	660	420	310	370
700	229	840	800	24-30	550	1600	750	550	400	460
800	241	950	905	24-33	640	1780	800	550	400	590
900	241	1050	1005	28-33	710	1920	850	550	400	730
1000	300	1160	1110	28-36	770	1960	1000	750	500	920
1200	360	1380	1330	32-39	875	2360	1050	750	500	1200
1400	390	1590	1530	36-42	970	1530	800	890		1460
1600	440	1820	1750	40-48	1100	1640	800	890		1850
1800	490	2020	1950	44-48	1200	1800	830	920		2080
2000	540	2230	2150	48-48	1290	2100	850	940		2660

蜗轮传动对夹式金属硬密封、氟塑料偏心蝶阀D373^H_F-¹⁶₂₅10C(P.R.V)

D373^H_F-16C(P.R.V)连接尺寸 Connection Dimension

通径 (DN) Diameter	L	D1	D	Z-Φd	H	Ho	A	B	Do	Wt/Kgs
50	43	125	102	4-18	112	260	200	200	160	15
65	46	145	122	4-18	115	280	200	200	160	17
80	64	160	133	8-18	120	355	220	200	160	23
100	64	180	158	8-18	140	390	240	200	160	28
125	70	210	184	8-18	170	490	260	200	160	34
150	76	240	212	8-22	180	630	280	280	240	38
200	89	295	268	12-22	210	690	320	280	240	44
250	114	355	320	12-26	240	830	360	280	240	58
300	114	410	370	12-26	290	930	460	420	310	73
350	127	470	430	16-26	320	1010	500	420	310	150
400	140	525	482	16-30	350	1070	540	420	310	240
450	152	585	532	20-30	380	1140	580	420	310	280
500	152	650	585	20-33	410	1200	620	420	310	350
600	178	770	685	20-36	470	1340	660	420	310	470
700	229	840	800	24-36	550	1600	750	550	400	600
800	241	950	905	24-39	640	1780	800	550	400	700
900	241	1050	1005	28-39	710	1920	850	550	400	840
1000	300	1170	1110	28-42	770	1960	1000	750	500	1100
1200	360	1390	1330	32-48	875	2360	1050	750	500	1300
1400	390	1590	1530	36-48	970	1530	800	890		1470
1600	440	1820	1750	40-56	1100	1640	800	890		1870

D373^H_F-25C(P.R.V)连接尺寸 Connection Dimension


通径 (DN) Diameter	L	D1	D	Z-Φd	H	Ho	A	B	Do	Wt/Kgs
50	43	125	102	4-18	112	260	200	200	160	15
65	46	145	122	8-18	115	280	200	200	160	17
80	64	160	133	8-18	120	355	220	200	160	23
100	64	190	158	8-22	140	390	240	200	160	28
125	70	220	184	8-26	170	490	260	200	160	35
150	76	250	212	8-26	180	630	260	280	240	40
200	89	310	268	12-26	210	690	320	280	240	50
250	114	370	330	12-30	240	830	360	280	240	68
300	114	430	390	16-30	290	930	460	420	310	80
350	127	490	450	16-33	320	1010	500	420	310	150
400	140	550	505	16-36	350	1070	540	420	310	250
450	152	600	555	20-36	380	1140	580	420	310	300
500	152	660	610	20-36	410	1200	620	420	310	370
600	178	770	720	20-39	470	1340	660	420	310	490
700	229	875	820	24-42	550	1600	750	550	400	630
800	241	990	930	24-48	640	1780	800	550	400	720
900	241	1090	1030	28-48	710	1920	850	550	400	870
1000	300	1210	1140	28-56	770	1960	1000	750	500	1150

D373^H_F-40C(P.R.V)连接尺寸 Connection Dimension

通径 (DN) Diameter	L	D1	D	Z-Φd	H	Ho	A	B	Do	Wt/Kgs
50	43	125	102	4-18	112	260	200	200	160	16
65	46	145	122	8-18	122	280	200	200	160	18
80	64	160	133	8-18	122	355	220	200	160	25
100	64	190	158	8-22	138	485	280	200	160	30
125	70	220	184	8-26	164	538	280	200	160	37
150	76	250	212	8-26	175	667	280	280	240	44
200	89	320	268	12-30	208	787	280	280	240	55
250	114	385	330	12-33	243	823	280	280	240	73
300	114	450	390	16-33	283	908	450	420	310	85
350	127	510	450	16-36	310	964	450	420	310	160
400	140	585	505	16-39	350	1330	540	437	310	260

电动对夹式金属硬密封、氟塑料密封偏心蝶阀D973^H_F-10C(P.R.V)系列

Electromotor wafer metal hard sealing, fluorine plastic sealing eccentricity butterfly valve D973^H_F-10 C(P.R.V) Serials

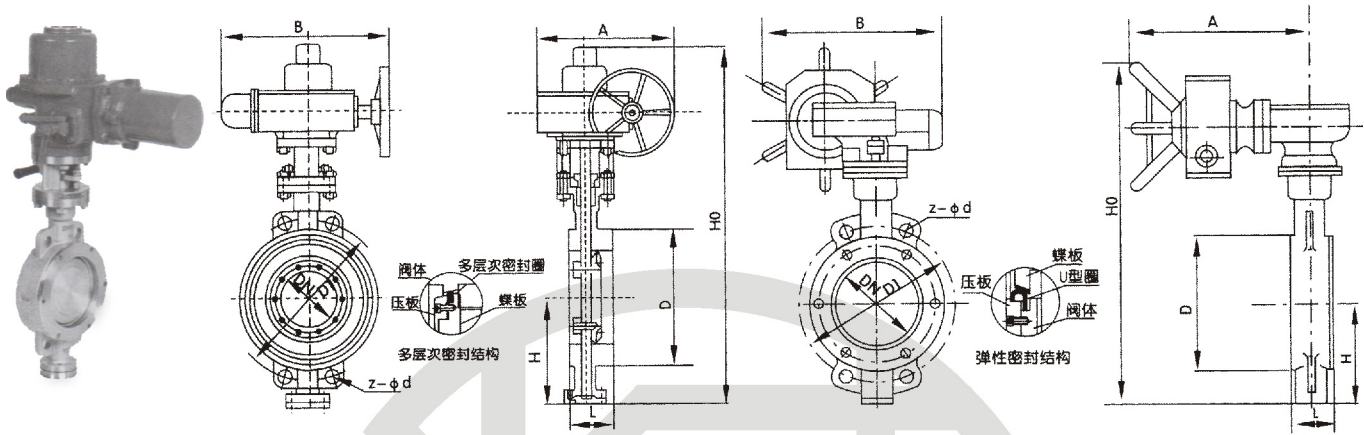

应用规范：

- 1、设计、制造按GB/T12238-89
- 2、结构长度按GB/T12221-89
- 3、连接法兰：GB9113-88
- 4、阀门检查和试验按GB/T13927-92

NOTE

- 1.Design Manafacure According to GB/T12238-89
- 2.Face to Face According to GB12221-89
- 3.End Flange Dimension According to GB9113-88
- 4.Valve Check and Test According to GB13927-92

D973^H_F-10C(P.R.V)连接尺寸 Connection Dimension

通径 (DN) Diameter	L	D1	D	Z-Φd	H	Ho	A	B	Wt/Kgs
50	43	125	102	4-18	112	412	250	255	42
65	46	145	122	4-18	122	432	250	255	47
80	64	160	133	8-18	122	450	250	255	50
100	64	180	158	8-18	138	485	250	255	60
125	70	210	184	8-18	164	532	250	255	80
150	76	240	212	8-22	175	667	300	315	110
200	89	295	268	8-22	205	787	300	315	130
.250	114	350	320	12-22	243	823	300	315	170
300	114	400	370	12-22	283	908	300	315	200
350	127	460	430	16-22	310	964	300	315	240
400	140	515	482	16-26	340	1022	300	315	280
450	152	565	532	20-26	380	1390	575	714	350
500	152	620	585	20-26	410	1450	575	714	430
600	178	725	685	20-30	470	1640	656	810	520
700	229	840	800	24-30	550	1844	656	810	650
800	241	950	905	24-33	640	2040	656	810	760
900	241	1050	1005	28-33	710	2255	785	863	980
1000	300	1160	1110	28-36	770	2380	785	863	1300
1200	360	1380	1330	32-39	890	2640	785	863	1800
1400	390	1590	1530	36-42	970	1530	800	890	1460
1600	440	1820	1750	40-48	1100	1640	800	890	1850
1800	490	2020	1950	44-48	1200	1800	830	920	2080
2000	540	2230	2150	48-48	1290	2100	850	940	2660

电动对夹式金属硬密封、氟塑料密封偏心蝶阀D973^H_F-¹⁶₂₅10C(P.R.V)系列

D973^H_F-16C(P.R.V)连接尺寸 Connection Dimension

通径 (DN) Diameter	L	D1	D	Z-Φd	H	Ho	A	B	Wt/Kgs
50	43	125	102	4-18	112	412	250	255	42
65	46	145	122	4-18	122	432	250	255	47
80	64	160	133	8-18	122	450	250	255	50
100	64	180	158	8-18	138	485	250	255	60
125	70	210	184	8-18	164	532	250	255	80
150	76	240	212	8-22	175	667	300	315	110
200	89	295	268	12-22	205	787	300	315	130
250	114	355	320	12-26	243	823	300	315	190
300	114	410	370	12-26	283	908	300	315	210
350	127	470	430	16-26	310	964	300	315	270
400	140	525	482	16-30	340	1022	300	315	320
450	152	585	532	20-30	380	1390	575	714	390
500	152	650	585	20-33	410	1450	575	714	480
600	178	770	685	20-36	470	1640	656	810	590
700	229	840	800	24-36	550	1844	656	810	710
800	241	950	905	24-39	640	2040	656	810	860
900	241	1050	1005	28-39	710	2255	785	863	1180
1000	300	1170	1110	28-42	770	2380	785	863	1700
1200	360	1390	1330	32-48	890	2640	785	863	2600
1400	390	1590	1530	36-48	970	1530	800	890	1470
1600	440	1820	1750	40-56	1100	1640	800	890	1870

D973^H_F-25C(P.R.V)连接尺寸 Connection Dimension


通径 (DN) Diameter	L	D1	D	Z-Φd	H	Ho	A	B	Wt/Kgs
50	43	125	102	4-18	112	412	250	255	42
65	46	145	122	8-18	122	432	250	255	47
80	64	160	133	8-18	122	450	250	255	50
100	64	190	158	8-22	138	485	250	255	60
125	70	220	184	8-26	164	532	300	315	80
150	76	250	212	8-26	175	667	300	315	110
200	89	310	268	12-26	208	787	300	315	140
250	114	370	330	12-30	243	823	300	315	200
300	114	430	390	16-30	283	908	300	315	230
350	127	490	450	16-33	310	964	300	315	300
400	140	550	505	16-36	340	1330	575	714	350
450	152	600	555	20-36	380	1390	575	714	430
500	152	660	610	20-36	410	1450	575	714	500
600	178	770	720	20-39	470	1640	656	810	650
700	229	875	820	24-42	550	1844	656	810	800
800	241	990	930	24-48	640	2040	785	863	1000
900	241	1090	1030	28-48	710	2255	785	863	1380
1000	300	1210	1140	28-56	780	2380	785	863	1900

D973^H_F-40C(P.R.V)连接尺寸 Connection Dimension

通径 (DN) Diameter	L	D1	D	Z-Φd	H	Ho	A	B	Wt/Kgs
50	43	125	102	4-18	112	412	250	255	45
65	46	145	122	8-18	122	432	250	255	50
80	64	160	133	8-18	122	450	250	255	55
100	64	190	158	8-22	138	485	250	255	65
125	70	220	184	8-26	164	532	250	255	86
150	76	250	212	8-26	175	667	300	315	116
200	89	320	268	12-30	208	787	300	315	147
250	114	385	330	12-33	243	823	300	315	207
300	114	450	390	16-33	283	908	300	315	238
350	127	510	450	16-36	310	964	300	315	310
400	140	585	505	16-39	350	1022	200	315	365

手动法兰金属硬密封、氟塑料密封偏心蝶阀D343^H_F-¹⁰₁₆10C(P.R.V)系列

Manual flanged metal hard sealing, fluorine plastic eccentricity butterfly valve D343^H_F-¹⁰₁₆10 C(P.R.V)Serials

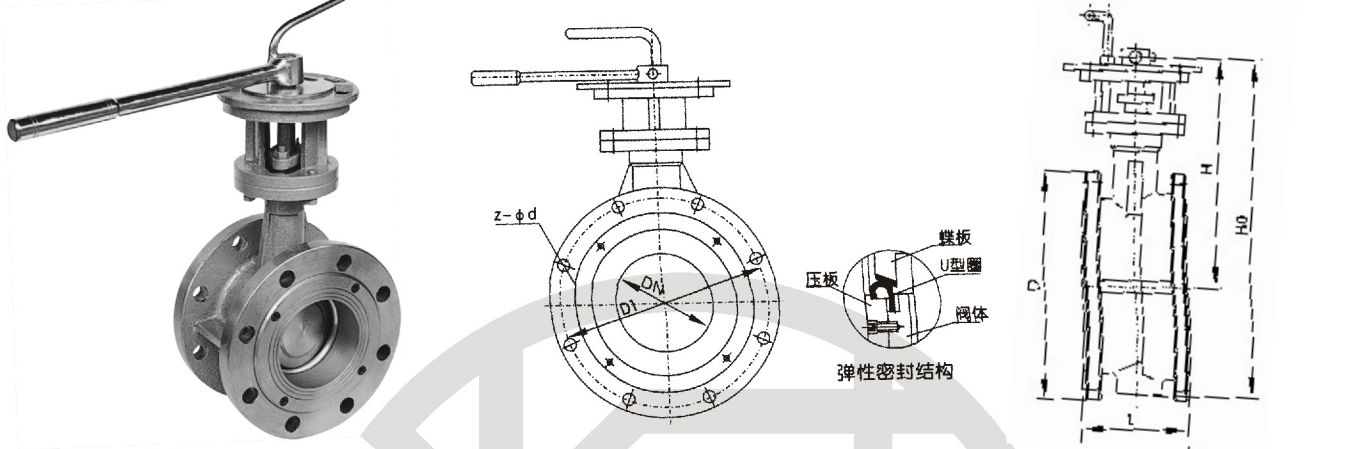

应用规范：

- 1、设计、制造按GB/T12238-89
- 2、结构长度按GB/T12221-89
- 3、连接法兰：GB9113-88
- 4、阀门检查和试验按GB/T13927-92

NOTE

- 1.Design Manafacure According to GB/T12238-89
- 2.Face to Face According to GB12221-89
- 3.End Flange Dimension According to GB9113-88
- 4.Valve Check and Test According to GB13927-92

D43^H_F-10C(P.R.V)连接尺寸 Connection Dimension


通径 (DN) Diameter	L	D1	D	Z-Φd	H	Ho	Wt/Kgs
50	108	125	165	4-18	112	250	23
65	112	145	185	4-18	115	265	29
80	114	160	200	8-18	120	345	35
100	127	180	220	8-18	138	370	58
125	140	210	250	8-18	164	470	80
150	140	240	285	8-22	175	610	86

D43^H_F-16C(P.R.V)连接尺寸 Connection Dimension

通径 (DN) Diameter	L	D1	D	Z-Φd	H	Ho	Wt/Kgs
50	108	125	165	4-18	112	250	23
65	112	145	185	4-18	115	265	29
80	114	160	200	8-18	120	345	35
100	127	180	220	8-18	138	370	58
125	140	210	250	8-18	164	470	80
150	140	240	285	8-22	175	610	86

蜗轮传动法兰金属硬密封、氟塑料偏心蝶阀D343^H_F-10C(P.R.V)系列

Worm wheel driing flanged metal hard sealing, fluorine plastic sealing eccentricity butterfly valve D343^H_F-10 C(P.R.V) Serials

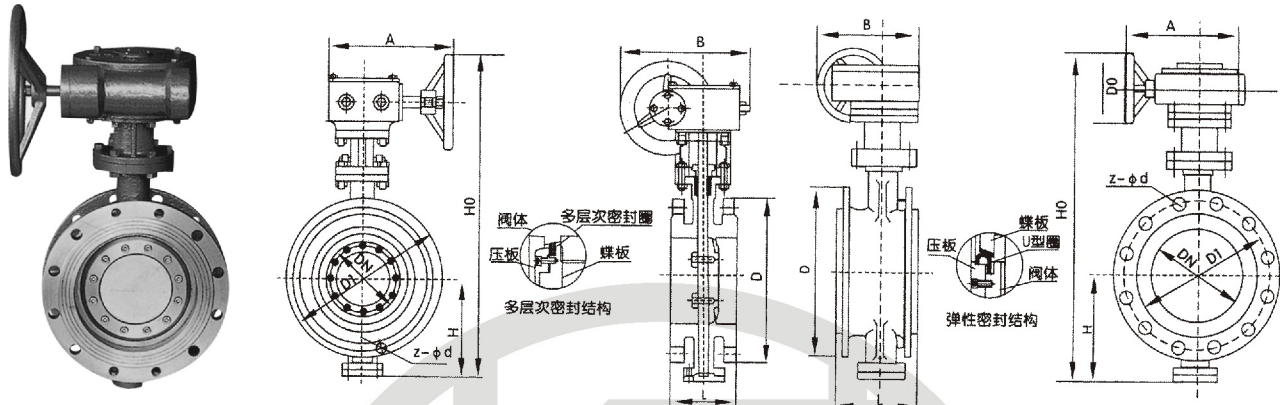

应用规范:

- 1、设计、制造按GB/T12238-89
- 2、结构长度按GB/T12221-89
- 3、连接法兰：GB9113-88
- 4、阀门检查和试验按GB/T13927-92

NOTE

- 1.Design Manafacure According to GB/T12238-89
- 2.Face to Face According to GB12221-89
- 3.End Flange Dimension According to GB9113-88
- 4.Valve Check and Test According to GB13927-92

D343^H_F-10C(P.R.V)连接尺寸 Connection Dimension

通径 (DN) Diameter	L	D1	D	Z-Φd	H	Ho	A	B	Do	Wt/Kgs
50	108	125	165	4-18	112	260	200	200	160	30
65	112	145	185	4-18	115	280	200	200	160	37
80	114	160	200	8-18	120	355	220	200	160	45
100	127	180	220	8-18	138	390	220	200	160	74
125	140	210	250	8-18	164	490	220	200	160	100
150	140	240	285	8-22	175	630	300	280	240	110
200	152	295	340	8-22	208	690	300	280	240	150
.250	165	350	395	12-22	243	830	300	280	240	190
300	178	400	445	12-22	283	930	440	420	310	230
350	190	460	505	16-22	310	1010	440	420	310	290
400	216	515	565	16-26	340	1070	440	420	310	350
450	222	565	615	20-25	380	1140	540	437	310	450
500	229	620	670	20-26	410	1200	540	437	310	550
600	267	725	780	20-30	470	1340	540	437	310	710
700	292	840	895	24-30	550	1600	640	526	400	850
800	318	950	1015	24-33	640	1780	640	526	400	1100
900	330	1050	1115	28-33	710	1920	740	600	400	1300
1000	410	1160	1230	28-36	770	1960	740	600	500	1600
1200	470	1380	1455	32-39	890	2360	740	600	500	1980
1400	530	1590	1675	36-42	980	1540	810	890		2760
1600	600	1820	1915	40-48	1150	1670	810	890		3470
1800	670	2020	2115	44-48	1230	1870	830	920		4200
2000	760	2230	2325	48-48	1300	2120	850	940		5360

蜗轮传动法兰金属硬密封、氟塑料密封偏心蝶阀D343^H_F-25¹⁶₂₅⁴⁰C(P.R.V)系列

D343^H_F-16C(P.R.V)连接尺寸 Connection Dimension

通径 (DN) Diameter	L	D1	D	Z-Φd	H	Ho	A	B	Do	Wt/Kgs
50	108	125	165	4-18	112	260	200	200	160	30
65	112	145	185	4-18	115	280	200	200	160	37
80	114	160	200	8-18	120	355	220	200	160	45
100	127	180	220	8-18	138	390	220	200	160	75
125	140	210	250	8-18	164	490	220	200	160	105
150	140	240	285	8-22	175	630	300	280	240	115
200	152	295	340	12-22	208	690	300	280	240	160
250	165	355	405	12-26	243	830	300	280	240	220
300	178	410	460	12-26	283	930	440	420	310	260
350	190	470	520	16-26	310	1010	440	420	310	340
400	216	525	580	16-30	340	1070	440	420	310	410
450	222	585	640	20-30	380	1140	540	437	310	490
500	229	650	715	20-33	410	1200	540	437	310	605
600	267	770	840	20-36	470	1340	540	437	310	780
700	292	840	910	24-36	550	1600	640	526	400	960
800	318	950	1025	24-39	640	1780	640	526	400	1050
900	330	1050	1125	28-39	710	1920	740	600	400	1500
1000	410	1170	1255	28-42	770	1960	740	600	500	1800
1200	470	1390	1485	32-48	890	2360	740	600	500	2300
1400	530	1590	1690	36-48	980	1530	810	890		2900
1600	600	1820	1930	40-56	1150	1670	810	890		3820

D343^H_F-25C(P.R.V)连接尺寸 Connection Dimension


通径 (DN) Diameter	L	D1	D	Z-Φd	H	Ho	A	B	Do	Wt/Kgs
50	108	125	165	4-18	112	260	200	200	160	34
65	112	145	185	8-18	115	280	200	200	160	40
80	114	160	200	8-18	120	355	220	200	160	50
100	127	190	235	8-22	138	485	280	200	160	84
125	140	220	270	8-26	164	538	280	200	160	110
150	140	250	300	8-26	175	667	280	280	240	120
200	152	310	360	12-26	208	787	280	280	240	165
250	165	370	425	12-30	243	823	280	280	240	240
300	178	430	485	16-30	283	908	450	420	310	320
350	190	490	555	16-33	310	964	450	420	310	430
400	216	550	620	16-36	350	1130	540	437	310	560
450	222	600	670	20-36	380	1140	540	437	310	620
500	229	660	730	20-36	410	1200	540	437	310	730
600	267	770	845	20-39	470	1340	540	437	400	990
700	292	875	960	24-42	550	1600	640	526	400	1150
800	318	990	1085	24-48	640	1780	640	526	500	1500
900	330	1090	1185	28-48	710	1920	740	600	500	1800
1000	410	1210	1320	28-56	780	1960	740	600	500	2200

D343^H_F-40C(P.R.V)连接尺寸 Connection Dimension

通径 (DN) Diameter	L	D1	D	Z-Φd	H	Ho	A	B	Do	Wt/Kgs
50	108	125	165	4-18	112	260	200	200	160	37
65	112	145	185	8-18	122	280	200	200	160	43
80	114	160	200	8-18	122	355	220	200	160	54
100	127	190	235	8-22	138	485	280	200	160	90
125	140	220	270	8-26	164	538	280	200	160	115
150	140	250	300	8-26	175	667	280	280	240	125
200	152	320	375	12-30	208	787	280	280	240	172
250	165	385	450	12-33	243	823	280	280	240	248
300	178	450	515	16-33	283	908	450	420	310	330
350	190	510	580	16-36	310	964	450	420	310	440
400	216	585	660	16-30	350	1330	540	437	310	572

电动法兰金属硬密封、氟塑料密封偏心蝶阀D943^H_F-10C(P.R.V)系列

Electromotor flanged metal hard sealing, fluorine plastic sealing eccentricity butterfly valve D943^H_F-10 C(P.R.V) Serials

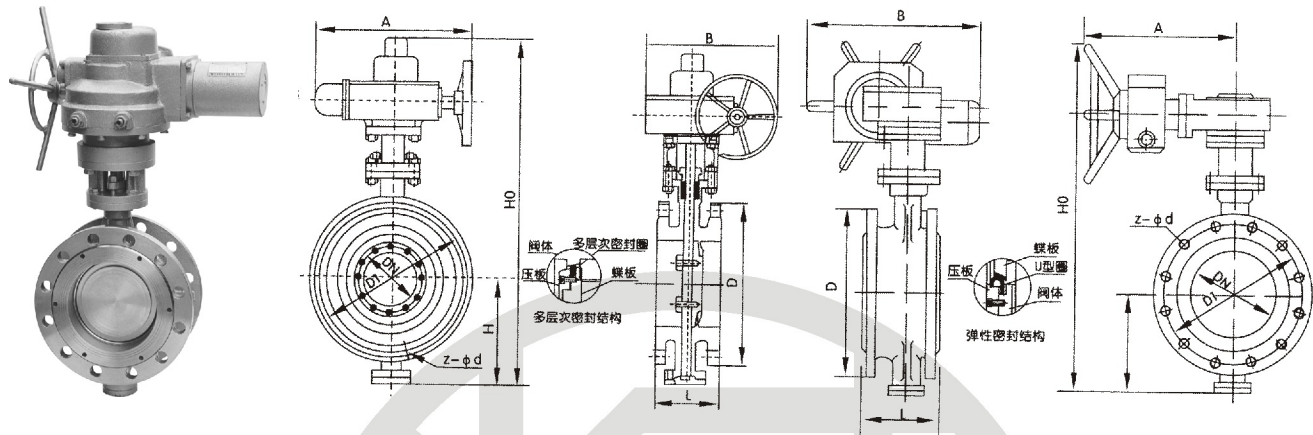

应用规范:

- 1、设计、制造按GB/T12238-89
- 2、结构长度按GB/T12221-89
- 3、连接法兰: GB9113-88
- 4、阀门检查和试验按GB/T13927-92

NOTE

- 1.Design Manafacure According to GB/T12238-89
- 2.Face to Face According to GB12221-89
- 3.End Flange Dimension According to GB9113-88
- 4.Valve Check and Test According to GB13927-92

D943^H_F-10C(P.R.V)连接尺寸 Connection Dimension

通径 (DN) Diameter	L	D1	D	Z-Φd	H	Ho	A	B	Wt/Kgs
50	108	125	165	4-18	112	412	250	255	48
65	112	145	185	4-18	122	432	250	255	55
80	114	160	200	8-18	122	450	250	255	63
100	127	180	220	8-18	138	485	250	255	92
125	140	210	250	8-18	164	532	250	255	110
150	140	240	285	8-22	175	667	300	315	130
200	152	295	340	8-22	208	787	300	315	160
.250	165	350	395	12-22	243	823	300	315	210
300	178	400	445	12-22	283	908	300	315	250
350	190	460	505	16-22	310	964	300	315	320
400	216	515	565	16-26	340	1022	300	315	380
450	222	565	615	20-25	380	1390	575	714	450
500	229	620	670	20-26	410	1450	575	714	560
600	267	725	780	20-30	470	1640	656	810	720
700	292	840	895	24-30	550	1844	656	810	860
800	318	950	1015	24-33	640	2040	656	810	1100
900	330	1050	1115	28-33	710	2255	785	863	1300
1000	410	1160	1230	28-36	770	2380	785	863	1570
1200	470	1380	1455	32-39	890	2640	785	863	2100
1400	530	1590	1675	36-42	980	1540	810	890	2760
1600	600	1820	1915	40-48	1150	1670	810	890	3470
1800	670	2020	2115	44-48	1230	1870	830	930	4200
2000	760	2230	2325	48-48	1300	2120	850	940	5360

电动法兰式金属硬密封、氟塑料密封偏心蝶阀D943^H_F-16C(P.R.V)系列

D943^H_F-16C(P.R.V)连接尺寸 Connection Dimension

通径 (DN) Diameter	L	D1	D	Z-Φd	H	Ho	A	B	Wt/Kgs
50	108	125	165	4-18	112	412	250	255	48
65	112	145	185	4-18	122	432	250	255	55
80	114	160	200	8-18	122	450	250	255	63
100	127	180	220	8-18	138	485	250	255	92
125	140	210	250	8-18	164	532	250	255	110
150	140	240	285	8-22	175	667	300	315	130
200	152	295	340	12-22	208	787	300	315	180
250	165	355	405	12-26	243	823	300	315	230
300	178	410	460	12-26	283	908	300	315	280
350	190	470	520	16-26	310	964	300	315	330
400	216	525	580	16-30	340	1022	300	315	420
450	222	585	640	20-30	380	1390	575	714	530
500	229	650	715	20-33	410	1450	575	714	630
600	267	770	840	20-36	470	1640	656	810	810
700	292	840	910	24-36	550	1844	656	810	990
800	318	950	1025	24-39	640	2040	656	810	1200
900	330	1050	1125	28-39	710	2255	785	863	1600
1000	410	1170	1255	28-42	770	2380	785	863	1900
1200	470	1390	1485	32-48	890	2640	785	863	2500
1400	530	1590	1690	36-48	980	1540	810	890	2900
1600	600	1820	1930	40-56	1150	1670	810	890	3820

D943^H_F-25C(P.R.V)连接尺寸 Connection Dimension


通径 (DN) Diameter	L	D1	D	Z-Φd	H	Ho	A	B	Wt/Kgs
50	108	125	165	4-18	112	415	250	255	50
65	112	145	185	8-18	115	435	250	255	58
80	114	160	200	8-18	120	450	250	255	65
100	127	190	235	8-22	138	485	250	255	105
125	140	220	270	8-26	164	538	300	315	120
150	140	250	300	8-26	175	667	300	315	140
200	152	310	360	12-26	208	787	300	315	180
250	165	370	425	12-30	243	823	300	315	260
300	178	430	485	16-30	283	908	300	315	340
350	190	490	555	16-33	310	964	300	315	450
400	216	550	620	16-36	350	1330	575	714	590
450	222	600	670	20-36	380	1390	575	714	660
500	229	660	730	20-36	410	1450	575	714	780
600	267	770	845	20-39	470	1640	656	810	1100
700	292	875	960	24-42	550	1844	656	810	1200
800	318	990	1085	24-48	640	2040	785	863	1600
900	330	1090	1185	28-48	710	2255	785	863	1900
1000	410	1210	1320	28-56	780	2380	785	863	2300

D943^H_F-40C(P.R.V)连接尺寸 Connection Dimension

通径 (DN) Diameter	L	D1	D	Z-Φd	H	Ho	A	B	Wt/Kgs
50	108	125	165	4-18	112	412	250	255	55
65	112	145	185	8-18	122	432	250	255	65
80	114	160	200	8-18	122	450	250	255	80
100	127	190	235	8-22	138	485	250	255	110
125	140	220	270	8-26	164	532	250	255	128
150	140	250	300	8-26	175	667	300	315	150
200	152	320	375	12-30	208	787	300	315	190
250	165	385	450	12-33	243	823	300	315	272
300	178	450	515	16-33	283	908	300	315	350
350	190	510	580	16-36	310	964	300	315	465
400	216	585	660	16-39	350	1022	300	315	605

对焊式金属密封蝶阀

Eleventh、Butt-weld metal sealing butterfly valve

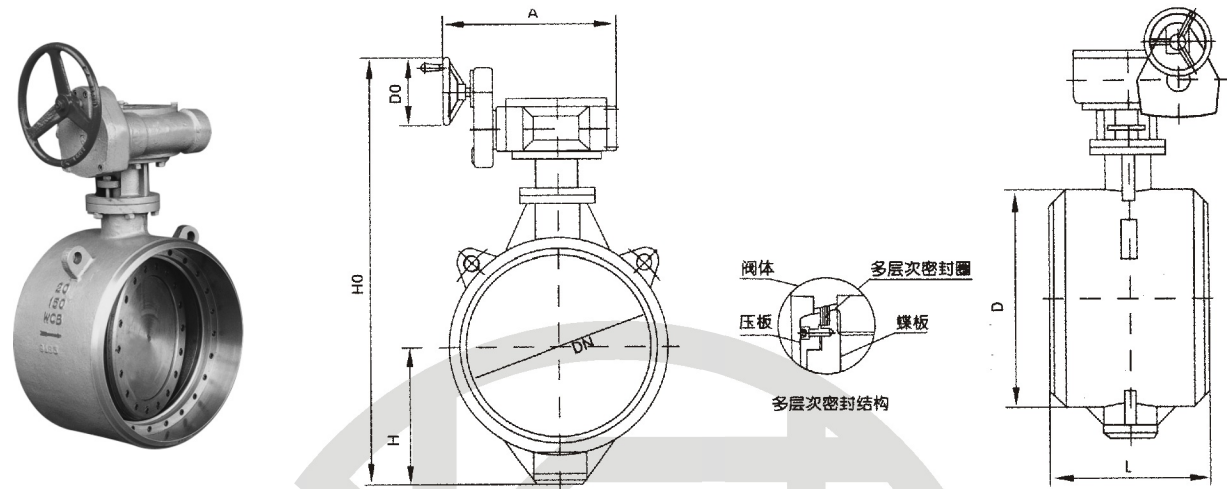

应用规范:

- 1、设计、制造按GB/T12238-89
- 2、结构长度按GB/T12221-89
- 3、连接法兰：GB9113-88
- 4、阀门检查和试验按GB/T13927-92

NOTE


- 1.Design Manafacure According to GB/T12238-89
- 2.Face to Face According to GB12221-89
- 3.End Flange Dimension According to GB9113-88
- 4.Valve Check and Test According to GB13927-92

主要外形和连接尺寸 Main figure and connection dimension

公称通径 Nominal Diameter		尺寸 Dimension					
in	DN(mm)	L	D	Do	H	Ho	A
4	100	190	110	157	100	376	194
5	125	200	135	205	113	410	268
6	150	210	161	205	130	468	268
8	200	230	222	205	205	586	268
10	250	250	278	235	235	638	306
12	300	270	330	235	275	734	306
14	350	290	382	296	309	827	416
16	400	310	432	296	346	924	416
18	450	330	484	296	392	1045	416
20	500	350	535	400	427	1128	475
24	600	390	636	400	509	1372	475
28	700	430	726	400	572	1590	475
32	800	470	826	440	638	1722	592
36	900	510	926	440	700	2025	592
40	1000	550	1028	440	765	2155	592
48	1200	630	1228	500	860	2360	640
56	1400	710	1428	500	986	2636	640
64	1600	790	1628	500	1106	2906	640

伸缩型金属密封蝶阀

Telescopic pattern metalicl sealing butterfly valve

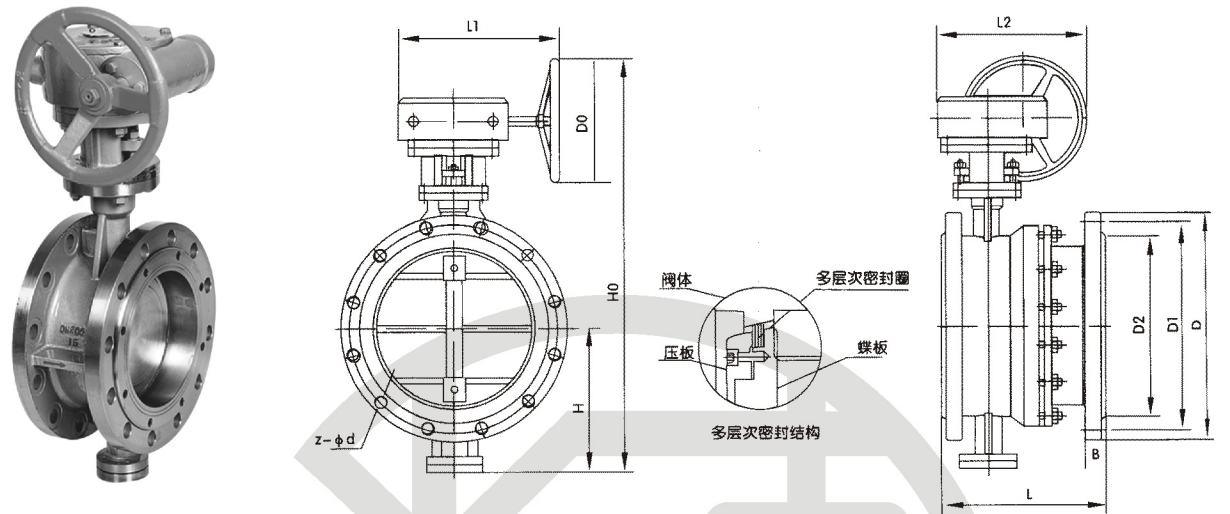

应用规范:

- 1、设计、制造按GB/T12238-89
- 2、结构长度按GB/T12221-89
- 3、连接法兰：GB9113-88
- 4、阀门检查和试验按GB/T13927-92

NOTE

- 1.Design Manafacure According to GB/T12238-89
- 2.Face to Face According to GB12221-89
- 3.End Flange Dimension According to GB9113-88
- 4.Valve Check and Test According to GB13927-92

产品特点及用途


本蝶阀是一种一阀两用的产品，集伸缩器和法兰式蝶阀于一体。它能在一定范围内可轴向伸缩，有利于管道热胀冷缩、消除管道振动及在一定角度范围内克服管道对接不同轴而产生的偏移，能极大的方便阀门管路的安装与拆卸，提高经济效益。适用于食品、饮料、医药纯净管路及工业环保、水处理、高层建筑、给排水管路作启闭或调节介质流量之用。

SD343H-10C(P、R、V) 连接尺寸 Connection DimensionH

公称通径 Nominal Diameter DN/mm	尺寸 Dimension												重量 Weight (kg)
	L	Lmax	Lmin	D	D1	D2	Do	B	H	Ho	L1	L2	Z-Φd
50	150	163	138	165	125	100	157	20	80	405	194	186	4-18
65	170	188	158	185	145	120	157	20	90	420	194	186	4-18
80	180	192	162	200	160	135	157	20	97.5	450	194	186	4-18
100	190	225	180	220	180	155	157	22	107.5	485	194	186	8-18
125	200	235	190	250	210	185	205	22	122.5	560	268	252	8-18
150	210	240	195	285	240	210	205	24	198	632	268	252	8-23
200	230	265	215	340	295	265	235	24	235	754	306	300	8-23
250	250	285	235	395	350	320	235	26	276	784	306	300	12-23
300	270	302	252	445	400	368	296	26	308	924	416	400	12-23
350	290	321	271	505	460	428	296	26	340	990	416	400	16-23
400	310	343	283	565	515	482	296	26	374	1058	416	400	16-25
450	330	360	300	615	565	532	400	28	384	1210	475	420	20-25
500	350	380	320	670	620	585	400	28	448	1295	475	420	20-25
600	390	425	365	780	725	685	400	30	490	1468	475	420	20-30

ANSI美标法兰连接金属密封蝶阀 ANSI Flange connection metallic seal butterfly valve

Manual D43 pattern or D41 pattern Pneumatic D643 pattern or D641 pattern Electric D943 pattern or D941 pattern Worm wheel driin D343 pattern or D341 pattern 手动D43型或D41型 气动D643型或D641型 电动D943型或D941型 蜗轮传动D343型或D341型

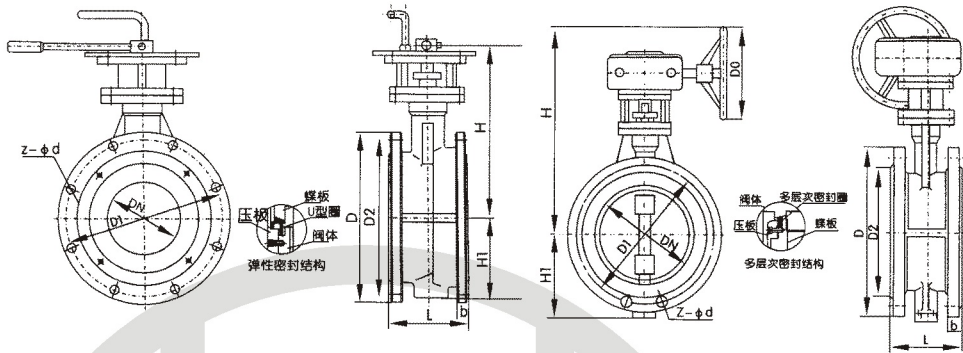

应用规范:

- 1、设计、制造按MSS-SP-68
- 2、结构长度按ISO5752第13系列
- 3、连接法兰: ANSIB16.5
- 4、阀门检查和试验按AP1598


NOTE

- 1.Design Manafacure According to MSS-SP-68
- 2.Face to Face According to ISO5752 of 13th seria
- 3.End Flange Dimension According to ANSIB16.5
- 4.Valve Check and Test According to Ap1598

法兰连接、主要尺寸及重量 Flange connection, main dimension and weight

压力级 Pressure	公称通径 Nominal Diameter		尺 寸 Dimension										重量(kg) Weight	
	in	mm	L	D	D1	D2	b	Z-Φd	Do	H1	H			
											D41	D341	D41	D341
Class 150	1 1/2	38	106	127	98.5	73	15	4-15	140	76	198	248	7	11
	2	51	108	152	120.5	92	16	4-19	140	85	202	254	9	12
	2 1/2	64	112	178	139.5	105	18	4-19	160	95	222	278	11.5	16
	3	76	114	190	152.5	127	19	4-19	160	106	246	312	13	20
	4	102	127	229	190.5	157	24	8-19	180	114	270	330	16.5	23
	5	127	140	254	216	186	24	8-22	180	130	294	368	22	29
	6	152	140	279	241.5	216	26	8-22	230	148	326	404	30.5	40.5
	8	203	152	343	298.5	270	29	8-22	230	176	-	496	-	81
	10	254	165	406	362	324	31	12-25	280	210	-	558	-	108
	12	305	178	483	432	381	32	12-25	310	238	-	632	-	135
	14	337	190	533	476	413	35	12-29	310	270	-	672	-	188
	16	387	216	597	540	470	37	16-29	310	302	-	714	-	255
	18	438	222	635	578	533	40	16-32	380	332	-	768	-	340
	20	489	229	699	635	584	43	20-32	380	370	-	828	-	445
Class 300	24	591	267	813	749.5	692	48	20-35	450	432	-	952	-	578
	1 1/2	38	106	156	114.5	73	21	4-22	140	76	198	248	10	14
	2	51	108	165	127	92	23	8-19	140	85	202	254	11	15
	2 1/2	64	112	190	149	105	26	8-22	180	95	222	288	15	20
	3	76	114	210	168.5	127	29	8-22	180	106	246	322	17.5	25
	4	102	127	254	200	157	32	8-22	230	122	278	355	21.5	29
	5	127	140	279	235	186	35	8-22	230	140	304	392	28.5	36
	6	152	140	318	270	216	37	12-22	280	156	336	428	39	50
	8	203	152	381	330	270	42	12-25	280	186	-	520	-	96.5
	10	254	165	445	387.5	324	48	16-29	310	220	-	574	-	127
	12	305	178	521	451	381	51	16-32	380	250	-	668	-	159.5
	14	337	190	584	514.5	413	54	20-32	380	288	-	708	-	222.5
	16	387	216	648	571.5	470	58	20-35	380	322	-	750	-	298
	18	432	222	711	628.5	533	61	24-35	450	348	-	802	-	399
20	483	229	775	686	584	64	24-35	450	378	-	862	-	523	
24	584	267	914	813	692	70	24-41	560	434	-	1006	-	672	

D71^X_J-⁶₁₀、D₃71^X_J-⁶₁₆C.P.R.Z系列手动、蜗轮传动软密封对夹式蝶阀

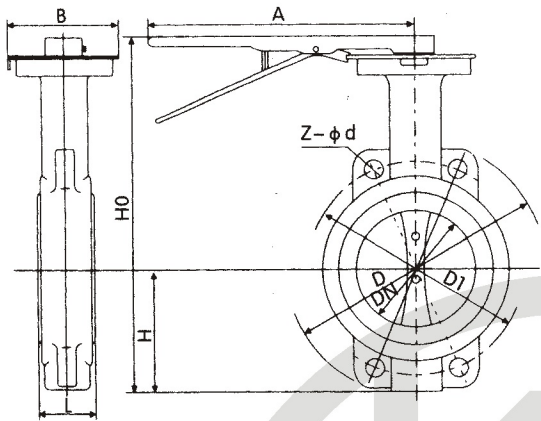

应用规范:

- 1、设计、制造按GB/T12238-89
- 2、结构长度按GB/T12221-89
- 3、连接法兰: GB4216.4-84;GB9115.8-88
- 4、阀门检查和试验按GB/T13927-92

性能规范:

阀体材料: 铸铁、碳钢、不锈钢等

密封圈材料: 丁腈橡胶×1 -46~+121℃

氯丁橡胶×2 -29~+99℃

丁腈橡胶×3 -23~+82℃

氯丁橡胶×4 -23~+150℃

聚四氯乙烯塑料F4 +10~+150℃

适用介质: 淡水、污水、海水、空气、蒸汽、
食品、药品、名种油类、酸类、
碱类、盐类等。

D71^X_J-⁶₁₀C.P.R.Z连接尺寸


通径 (DN) Diameter	L	D1	D	Z-Φd	H	Ho	A	B
50	43	125	165	4-18	63	235	270	65
65	46	145	185	4-18	70	250	270	65
80	46	160	200	8-18	83	275	270	65
100	52	180	220	8-18	105	316	270	65
125	56	210	250	8-18	115	340	310	65
150	56	240	285	8-22	137	376	310	65
200	60	295	340	8-22	164	472	365	90

D₃71^X_J-⁶₁₆C.P.R.Z连接尺寸

通径 (DN) Diameter	L	D1	D	Z-Φd	H	Ho	A	B	DO
50	43	125	165	4-18	63	306	193	125	150
65	46	145	185	4-18	70	321	193	125	150
80	46	160	200	8-18	83	346	193	125	150
100	52	180	220	8-18	105	387	193	125	150
125	56	210	250	8-18	115	411	193	125	150
150	56	240	285	8-22	137	447	193	125	150
200	60	295	340	8-22	164	572	283	165	220
.250	68	350	395	12-22	206	646	283	165	220
300	78	400	445	12-22	230	738	334	175	280
350	78	460	505	16-22	248	761	334	175	280
400	102	515	565	16-26	289	877	425	210	320
450	114	565	615	20-26	320	938	425	210	320
500	127	620	670	20-26	343	993	425	210	320
600	154	725	780	20-30	413	1131	425	210	320
700	165	840	895	24-30	489	1476	620	320	400
800	190	950	1015	24-33	525	1533	620	320	400
900	203	1050	1115	28-33	585	1655	620	320	400
1000	216	1160	1230	28-36	640	1765	620	400	400
1200	254	1380	1435	32-39	755	1995	620	400	400

注: 1、以上蝶阀的密封试验压力DN50~DN800为1.0MPa;DN900~DN1000为0.6MPa。
2、以上蝶阀的连接尺寸均按1.0MPa标准制造, 如用户需特殊需要, 订货时应注明。

D671^X_{J-16} C.P.R.Z系列气动对夹式软密封蝶阀

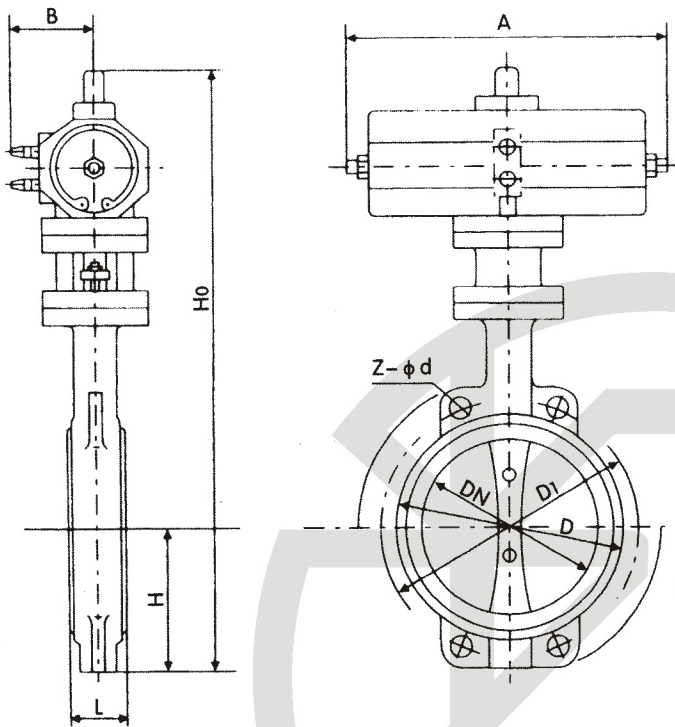

应用规范：

- 1、设计、制造按GB/T12238-89
- 2、结构长度按GB/T12221-89
- 3、连接法兰：GB4216.4-84;GB9115.8-88
- 4、阀门检查和试验按GB/T13927-92

性能规范：

阀体材料：铸铁、碳钢、不锈钢等

密封圈材料：丁腈橡胶×1 -46~+121℃

氯丁橡胶×2 -29~+99℃

丁腈橡胶×3 -23~+82℃

氯丁橡胶×4 -23~+150℃

聚四氯乙烯塑料F4 +10~+150℃

适用介质：淡水、污水、海水、空气、蒸汽、


食品、药品、各种油类、酸类、

碱类、盐类等。

D671^X_{J-10} C.P.R..Z连接尺寸

通径 (DN) Diameter	L	D1	D	Z-Φd	H	Ho	A	B
50	43	125	165	4-18	63	315	180	65
65	46	145	185	4-18	70	330	180	65
80	46	160	200	8-18	83	390	245	72
100	52	180	220	8-18	105	431	245	72
125	56	210	250	8-18	115	455	245	72
150	56	240	285	8-22	137	626	355	93
200	60	295	340	8-22	164	720	355	93
250	68	350	395	12-22	206	800	550	350
300	78	400	445	12-22	230	860	600	350
350	78	460	505	16-22	248	883	600	350
400	102	515	565	16-26	289	972	600	350
450	114	565	615	20-26	320	1043	750	380
500	127	620	670	20-26	343	1098	750	380
600	154	725	780	20-30	413	1236	750	380
700	165	840	895	24-30	478	1431	750	380
800	190	950	1015	24-33	525	1488	750	380

D971^X_{J-10} C.P.R.Z系列电动对夹式软密封蝶阀

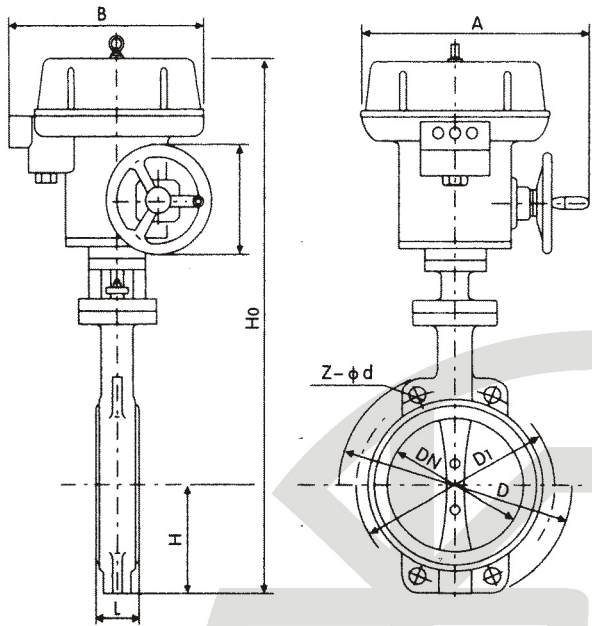

应用规范：

- 1、设计、制造按GB/T12238-89
- 2、结构长度按GB/T12221-89
- 3、连接法兰：GB4216.4-84;GB9115.8-88
- 4、阀门检查和试验按GB/T13927-92

性能规范：

阀体材料：铸铁、碳钢、不锈钢等

密封圈材料：丁腈橡胶×1 -46~+121℃

氯丁橡胶×2 -29~+99℃

丁腈橡胶×3 -23~+82℃

氯丁橡胶×4 -23~+150℃

聚四氯乙烯塑料F4 +10~+150℃

适用介质：淡水、污水、海水、空气、蒸汽、

食品、药品、各种油类、酸类、


碱类、盐类等。

D971^X_{J-10} C.P.R..Z连接尺寸

通径 (DN) Diameter	L	D1	D	Z-Φd	H	Ho	A	B	Wt/kgs
50	43	125	165	4-18	63	438	125	125	80
65	46	145	185	4-18	70	453	125	125	80
80	46	160	200	8-18	83	478	125	125	80
100	52	180	220	8-18	105	519	125	125	80
125	56	210	250	8-18	115	713	325	245	150
150	56	240	285	8-22	137	749	325	245	150
200	60	295	340	8-22	164	843	325	245	150
250	68	350	395	12-22	206	947	363	313	200
300	78	400	445	12-22	230	1013	363	313	200
350	78	460	505	16-22	248	1046	363	313	250
400	102	515	565	16-26	289	1135	363	313	250
450	114	565	615	20-26	320	1328	465	429	300
500	127	620	670	20-26	343	1226	546	431	360
600	154	725	780	20-30	413	1394	546	556	360
700	165	840	895	24-30	478	1534	546	556	360
800	190	950	1015	24-33	525	1159	546	556	360
900	203	1050	1115	28-33	585	1748	617	706	360
1000	216	1160	1230	28-36	640	1805	632	706	360
1200	254	1380	1455	32-39	755	2035	632	706	360

注：1、以上蝶阀的密封试验压力DN50~DN800为1.0MPa;DN900~DN1000为0.6MPa;DN1200~DN2000为0.25MPa。
2、以上蝶阀的连接尺寸均按1.0MPa标准制造，如用户需特殊需要，订货时应注明。

D41^X_{J-10}、D²₃41^X_{J-10}⁶/₁₆C.P.R.Z系列手动、蜗轮传动法兰式软密封蝶阀

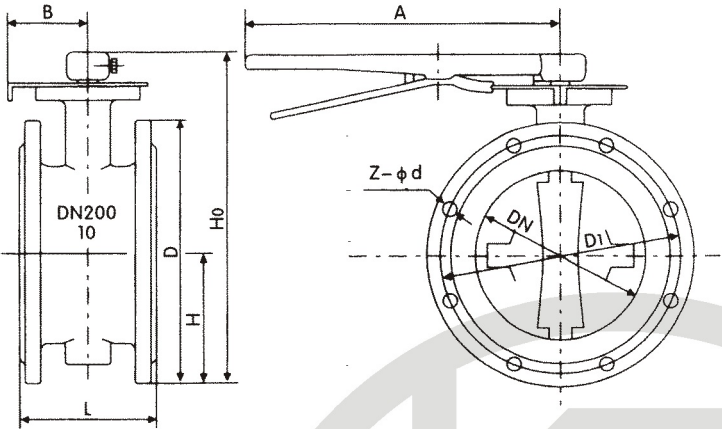

应用规范：

- 1、设计、制造按GB/T12238-89
- 2、结构长度按GB/T12221-89
- 3、连接法兰：GB4216.4-84;GB9115.8-88
- 4、阀门检查和试验按GB/T13927-92

性能规范：

阀体材料：铸铁、碳钢、不锈钢等
密封圈材料：丁腈橡胶×1 -46~+121℃
氯丁橡胶×2 -29~+99℃
丁腈橡胶×3 -23~+82℃
氯丁橡胶×4 -23~+150℃
聚四氯乙烯塑料F4 +10~+150℃
适用介质：淡水、污水、海水、空气、蒸汽、
食品、药品、各种油类、酸类、
碱类、盐类等。

D41^X_{J-10}C.P.R..Z连接尺寸


通径 (DN) Diameter	L	D1	D	Z-Φd	H	Ho	A	B	Wt/kgs
50	108	125	165	4-18	82.5	238	270	65	8.5
65	112	145	185	4-18	92.5	258	270	65	9.5
80	124	160	200	8-18	100	278	270	65	11
100	127	180	220	8-18	110	293	270	65	15
125	140	210	250	8-18	125	309	310	65	21
150	140	240	285	8-22	142.5	636	310	65	24
200	152	295	340	8-22	170	514	365	90	41

D²₃41^X_{J-10}⁶/₁₆C.P.R.Z连接尺寸

通径 (DN) Diameter	L	D1	D	Z-Φd	H	Ho	A	B	DO	Wt/kgs
50	108	125	165	4-18	63	306	193	125	150	13
65	112	145	185	4-18	70	321	193	125	150	14
80	124	160	200	8-18	83	345	193	125	150	15.5
100	127	180	220	8-18	105	387	193	125	150	19.5
125	140	210	250	8-18	115	411	193	125	150	25.5
150	140	240	285	8-22	137	447	193	125	150	27.5
200	152	295	340	8-22	164	572	283	165	220	48
250	165	350	395	12-22	206	646	283	165	220	69
300	178	400	445	12-22	230	738	334	175	280	91
350	190	460	505	16-22	248	761	334	175	280	110
400	216	515	565	16-26	289	877	425	210	320	140
450	222	565	615	20-26	320	938	425	210	320	180
500	229	620	670	20-26	343	993	425	210	320	215
600	267	725	780	20-30	413	1131	425	210	320	290
700	430	840	895	24-30	478	1476	620	320	400	560
800	470	950	1015	24-33	525	1533	620	320	400	910
900	510	1050	1115	28-33	585	1655	620	320	400	1500
1000	550	1160	1230	28-36	640	1765	620	400	400	1750
1200	630	1380	1455	32-39	755	1995	620	400	400	2180

注：1、以上蝶阀的密封试验压力DN50~DN800为1.0MPa;DN900~DN1000为0.6MPa。
2、以上蝶阀的连接尺寸均按1.0MPa标准制造，如用户需特殊需要，订货时应注明。

D641^X_{J-10}⁶/₁₆C.P.R.Z系列气动法兰式软密封蝶阀

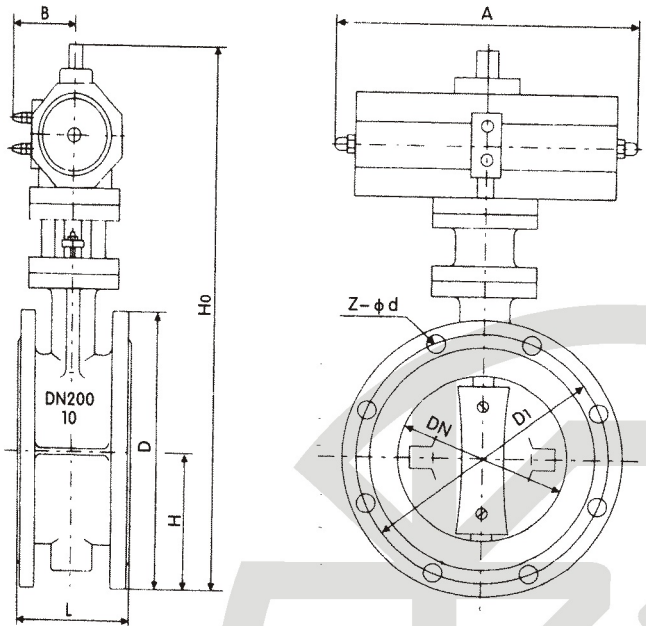

应用规范：

- 1、设计、制造按GB/T12238-89
- 2、结构长度按GB/T12221-89
- 3、连接法兰：GB4216.4-84;GB9115.8-88
- 4、阀门检查和试验按GB/T13927-92

性能规范：


阀体材料：铸铁、碳钢、不锈钢等
密封圈材料：丁腈橡胶×1 -46~+121℃
氯丁橡胶×2 -29~+99℃
丁腈橡胶×3 -23~+82℃
氯丁橡胶×4 -23~+150℃
聚四氯乙烯塑料F4 +10~+150℃
适用介质：淡水、污水、海水、空气、蒸汽、
食品、药品、各种油类、酸类、
碱类、盐类等。

D641^X_{J-10}⁶/₁₆C.P.R..Z连接尺寸

通径 (DN) Diameter	L	D1	D	Z-Φd	H	Ho	A	B	Wt/kgs
50	108	125	165	4-18	82.5	338	180	65	14
65	112	145	185	4-18	92.5	358	180	65	16
80	124	160	200	8-18	100	413	245	72	17
100	127	180	220	8-18	110	428	245	72	21
125	140	210	250	8-18	125	444	245	72	27
150	140	240	285	8-22	142.5	553	355	93	29
200	152	295	340	8-22	170	678	355	93	50
250	165	350	395	12-22	192.5	742	550	350	69
300	178	400	445	12-22	222.5	803	600	350	91
350	190	460	505	16-22	252.5	866	600	350	110
400	216	515	565	16-26	282.5	940	600	350	138
450	222	565	615	20-26	307.5	995	750	380	175
500	229	620	670	20-26	335	1058	750	380	210
600	267	725	780	20-30	390	1163	750	380	275
700	430	840	895	24-30	420	1283	750	380	530
800	470	950	1015	24-33	477.5	1398	750	380	590
900	510	1050	1115	28-33	517.5	1498	450	280	1400
1000	550	1160	1230	28-36	585.5	1608	650	280	1652

注：1、以上蝶阀的密封试验压力DN50~DN800为1.0MPa;DN900~DN1000为0.6MPa。
2、以上蝶阀的连接尺寸均按1.0MPa标准制造，如用户需特殊需要，订货时应注明。

D941^X_{J-6} C.P.R.Z系列电动法兰式软密封蝶阀

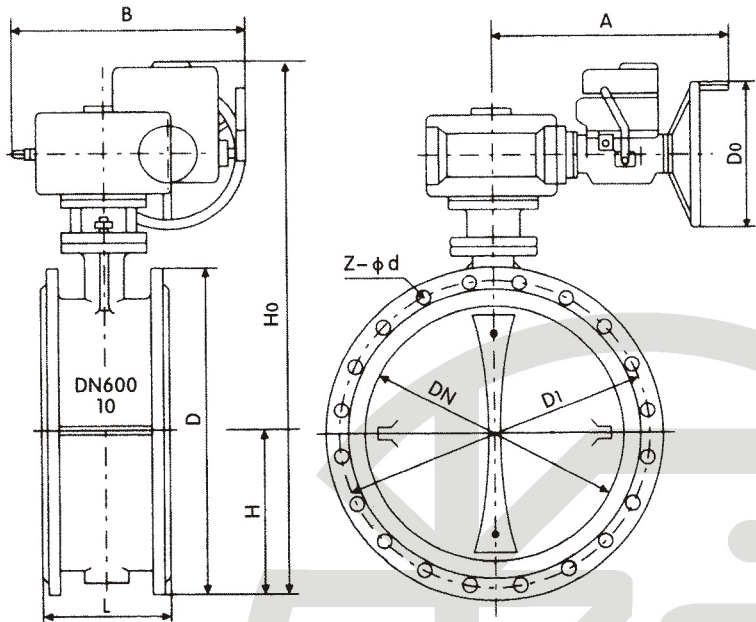

应用规范：

- 1、设计、制造按GB/T12238-89
- 2、结构长度按GB/T12221-89
- 3、连接法兰：GB4216.4-84;GB9115.8-88
- 4、阀门检查和试验按GB/T13927-92

性能规范：


阀体材料：铸铁、碳钢、不锈钢等
密封圈材料：丁腈橡胶×1 -46~+121℃
氯丁橡胶×2 -29~+99℃
丁腈橡胶×3 -23~+82℃
氯丁橡胶×4 -23~+150℃
聚四氟乙烯塑料F4 +10~+150℃
适用介质：淡水、污水、海水、空气、蒸汽、
食品、药品、名种油类、酸类、
碱类、盐类等。

D941^X_{J-6} C.P.R.Z连接尺寸

通径 (DN) Diameter	L	D1	D	Z-Φd	H	Ho	A	B	DO	Wt/kgs
50	108	125	165	4-18	82.5	443	125	125	80	51
65	112	145	185	4-18	92.5	463	125	125	80	62
80	124	160	200	8-18	100	483	125	125	80	73.5
100	127	180	220	8-18	110	498	125	125	80	87
125	140	210	250	8-18	125	682	325	245	150	98
150	140	240	285	8-22	142.5	736	325	245	150	102
200	152	295	340	8-22	170	800	325	245	150	150
250	165	350	395	12-22	192.5	895	363	313	200	170
300	178	400	445	12-22	222.5	956	363	313	200	220
350	190	460	505	16-22	252.5	1029	363	313	250	350
400	216	515	565	16-26	282.5	1103	363	313	250	430
450	222	565	615	20-26	307.5	1280	465	439	300	550
500	229	620	670	20-26	335	1186	546	431	360	580
600	267	725	780	20-30	390	1321	546	556	360	850
700	430	840	895	24-30	420	1431	546	556	360	950
800	470	950	1015	24-33	477.5	1542	546	556	360	1150
900	510	1050	1115	28-33	517.5	1800	617	706	360	1750
1000	550	1160	1230	28-36	585.5	2363	632	706	360	2100
1200	630	1380	1455	32-39	592.5	2583	632	706	360	2580

注：1、以上蝶阀的密封试验压力DN50~DN800为1.0MPa;DN900~DN1000为0.6MPa。
2、以上蝶阀的连接尺寸均按1.0MPa标准制造，如用户需特殊需要，订货时应注明。

D³₉4⁰₁W-^{0.5}_{2.5} C.P.R.V系列法兰式通风型蝶阀

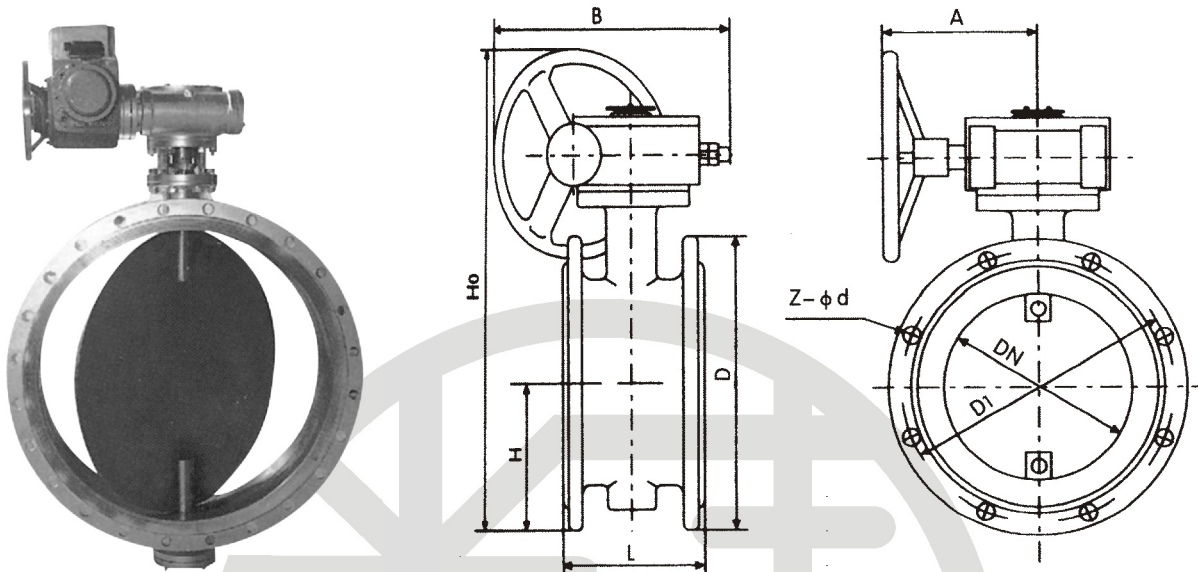

应用规范：

- 1、设计、制造按GB/T12238-89
- 2、结构长度按GB/T12221-89
- 3、连接法兰：GB4216.4-84;GB9115.8-88
- 4、阀门检查和试验按GB/T13927-92

用途及特点：

本蝶阀采用阀体同质材料加工成密封圈，采用蜗轮传动。
一般适用于工业、环保等管路作通风型调节介质流量之用。

主要技术参数：

公称通径	DN(mm)	50~2000		
公称压力	PN(MPa)	0.05	0.25	0.6
试验压力 Ps(MPa)	强度试验	0.075	0.375	0.9
	密封试验	≤ 1.5%泄漏量		
适用介质	煤气、含尘气体、烟道气等			
适用温度	-40~570℃			

主要零部件材料：

名称	材料
阀体	铸钢、不锈钢、铬镍钼钛钢、钛钢、铬钼钒钢
阀板	铸钢、不锈钢、铬镍钼钛钢、钛钢、铬钼钒钢
阀杆	碳钢、不锈钢、2Cr13、铬镍钼钛钢
阀座	与阀体相同
镶插件	氟塑料、柔性石墨

D34⁰₁W-^{0.5}_{2.5}₆C.P.R.V通风蝶阀连接尺寸

通径 (DN) Diameter	L	D1	D	Z-Φd	H	Ho	A	B	DO	Wt/kgs
50	108	110	140	4-14	70	286	125	193	150	14
65	112	130	160	4-14	80	306	125	193	150	15
80	112	150	190	4-18	95	334	125	193	150	17
100	127	170	210	4-18	105	354	125	193	150	20
125	140	200	240	8-18	120	384	125	193	150	25
150	140	225	265	8-18	132.5	409	125	193	150	29
200	152	280	320	8-18	160	593	165	283	220	47
.250	165	335	375	12-18	187.5	650	165	283	220	67
300	178	395	440	12-22	220	715	165	283	220	78
350	190	445	490	12-22	245	814	175	334	280	96
400	216	495	541	16-22	270	863	175	334	280	130
450	222	550	595	16-22	297.5	918	175	334	280	142
500	229	600	645	20-22	322.5	1016	210	425	320	191
600	267	705	755	20-26	377.5	1128	210	425	320	230
700	292	810	860	24-26	430	1233	210	425	320	250
800	218	920	975	24-30	487.5	1344	210	425	320	320
900	330	1120	1075	24-30	537.5	1560	320	620	400	410
1000	410	1120	1175	28-30	587.5	1660	320	620	400	510
1200PN0.6	470	1340	1405	32-33	702.5	1890	320	620	400	720
1200PN0.25	470	1320	1375	32-30	687.5	1860	320	620	400	700
1400	530		1420	36-30		2670				1270
1600	600		1620	40-33		2810				1730
1800	670		1820	44-39		3020				2750
2000	760		2020	48-42		3220				3050